



BECS

BPR1000

Multi-protocol tester

Multi use tester (Commitment for basic)


- Ping Test with fast access
- Search Telephone line
- Easy check for LAN Test
- Prompt Network configuration



Applications


Network Installation & Maintenance
- Data communication / Tele-communication






PING TEST

- Fast Ethernet access (10BASE-T/100BASE-TX)
- Auto configuration
- Auto negotiation




CABLE TEST

- Physical LAN TEST
- Each wire(-8pin) connection
- Search test of telephone




TELEPHONE

- High end telephone function
- Caller ID demodulation
- DTMF dialing
- Speakerphone



PING TEST

- Network configuration
- Supported Static IP
- Supported DHCP

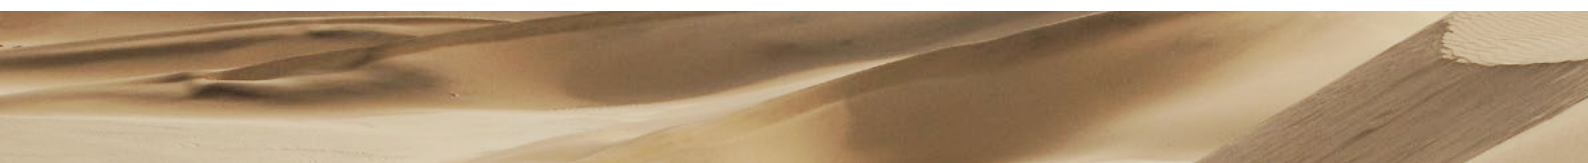

Specifications


Ping Test	
NetworkStandard	IEEE8023/8023u
Media Compatibility	10BASET, 100BASETX - Auto-negotiationSupported - 10/100 Mbpsfull and half duplex
MDI/MDIX	Auto-crossoverSupported
LAN Cable Test	
Test Method	Eachwire(β-pin) connectivity
Corded Telephone	
Caller ID Standard	Bell202A - Modulation: FSK - Logical1 (Mark): 1200+/-12 Hz - Logical0 (Space): 2200+/-22Hz - Transmissiorate: 1200+/-12 baud
DialingMethod	DTMF
LineImpedance	600 Ohm
Speakerphone	Supported
General	
Connector	RJ45, RJ11
Display	2.3" Mono GraphicLCD - BackLightSupported
Dimensions (widthx heightx depth)	Master - 3.3" x 7.4" x 1.4" - 841 mmx 188mmx 34.9mm Remote - 3.3" x 2.4" x 1.5" - 841 mmx 60mmx 37.1 mm
Weight (w/o Battery)	Master - 8.1 oz. (230g) Remote- 2.1 oz. (60g)
Battery	Master - 9V Alkaline(6LR61) Remote - 9V Alkaline(6LR61)/9V Carbon-Zinc(6F22)
OperatingTemperature	10°C ~ 40°C
StorageTemperature	-10°C ~ 60°C
RelativeHumidity	90%




Main menu - Mode select




Telephone /w Call ID display

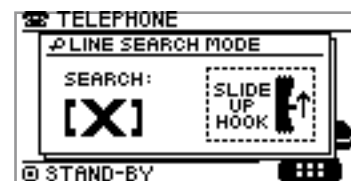


Telephone line search

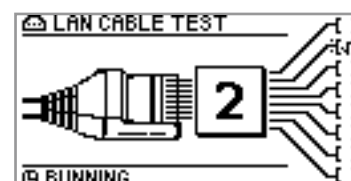


LAN cable physical test

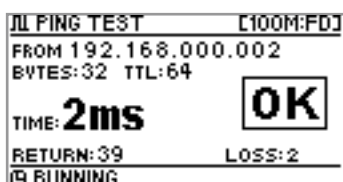

Ping test

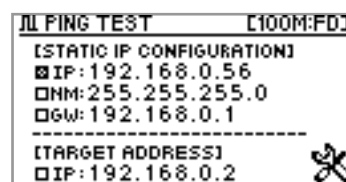

Network conf. /w Static IP

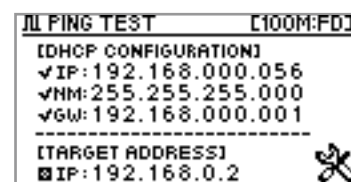

Network conf. /w DHCP