

# Intellian OW11HM



## Pro Flat Panel for Mobility

---

The OW11FM is the ideal Flat Panel user terminal for the Cruise, Energy, Merchant, Ferry and Transportation markets, delivering low-latency, high-speed connectivity and reliability for critical communications, crew welfare, safety, route planning, and entertainment.

---

### Optimized Performance

Utilizing Intellian's innovative antenna design, the OW11FM delivers the maximum throughput allowed on the OneWeb network. Offering the highest link margin, performance is guaranteed even over scan and at the lowest elevation angles, ensuring we meet the highest demands of maritime and land mobile customers.

### Harsh Environment Performance

The OW11FM is designed to ensure dependable performance in even the most demanding environments, operating in extremely low temperatures down to  $-40^{\circ}\text{C}$  and up to  $+55^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $131^{\circ}\text{F}$ ). Integrated radar rejection filtering ensures performance in high interference installations and reliable broadband services for customers situated in the most remote locations.

### Customer Network Exchange

Intellian's Customer Network Exchange (CNX) units are a critical component of any OneWeb user terminal installation, providing both the power and data connectivity to the Flat Panel Series user terminal, and the connectivity to customer equipment and networks. CNX variants are offered for specific deployment scenarios including Land Fixed, Land Mobile and Maritime.

### Simplified Installation

The lightweight design and optimal form factor of the OW11FM enables easy installation by a single person. The universal mount design supports standard maritime mounts and a variety of vehicle mounts. Installation is further simplified through use of combined power and data over a single coaxial cable connecting the outdoor CNX units. The use of Intellian's mobile app for site survey, automated configuration, and monitoring further reduces the time required to get online.

### Seamless Connectivity

The OW11FM features Intellian's advanced tracking technology, extended scan range, and blockage mitigation, improves connection reliability and availability even while in motion. Delivering the best performance at scan, the innovative flat panel technology facilitates smooth reliable handovers, which ensure seamless and uninterrupted connectivity.

---

Intellian's Flat Panel Series consists of a portfolio of Pro and Compact user terminals, based on active electronically scanned arrays (AESA) for Enterprise, Maritime and Land Mobility customers.

---


## Outdoor Units

Throughput (peak)	DL: 195 Mbps / UL: 37 Mbps
G/T	10.7 dB/K
EIRP	+36.6 dBW (Dual Carrier)
Field of View	+/- 70° from Zenith, 360° Azimuth
Size	96 cm x 50 cm x 16 cm (37.8" x 19.7" x 6.3")
Weight	16 kg (35 lb)
Power	340W (max)
Ingress	IP66
Operating Temp	-40 °C to +55 °C (-40 °F to 131 °F)
Interface	+56VDC, F-Type conn


## Installation

Mounting plate adaptor for maritime installation – Support for standard maritime wedge, vertical and mast mounts. For vehicles – Magnetic, 8020T-Slot Mount, and custom mount options are available.

Single Antenna Configuration with CNX-E/CNX-V

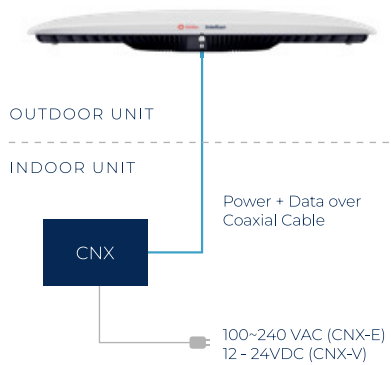

Dual Antenna Configuration with CNX-E

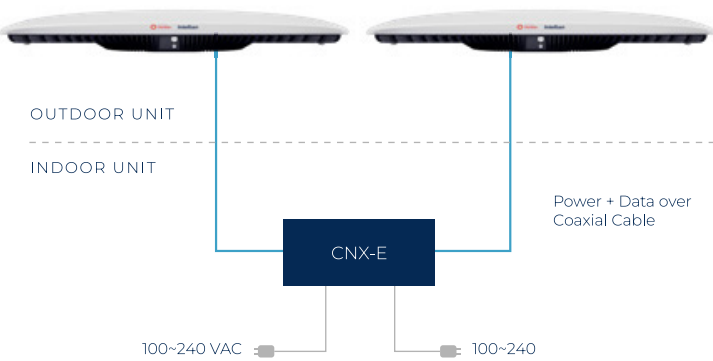

## Indoor Units

	CNX-WiFi	CNX-E
Dimensions	21 cm x 17 cm x 8 cm (8.2" x 6.7" x 3.1")	44.2 cm x 25 cm x 4.4 cm (19" x 1 RU chassis)
Weight	0.6 kg (1.3 lb)	6.3 kg (13.9 lb)
Power	18 W (max), 8 W (avg)	30 W (max), 16 W (avg)
Operating Temp	0 °C to +40 °C (32 °F to 104 °F)	-15 °C to +55 °C (5 °F to 131 °F)
Data Interface	WiFi-6 4-port GigE RJ45 switch	8-port GigE RJ45, 1x USB (Type-A) 1x NMEA0183
Power Input	Universal AC Power (100 – 240VAC)	Single or Dual 450W Power Modules 110V- 200VAC

